

heicko
e-ast gmbh

verkauf@heicko.de
www.heicko-bewegt.de


heicko connects...

compact

Screws, assembly items, chemicals, tools and more



Screws

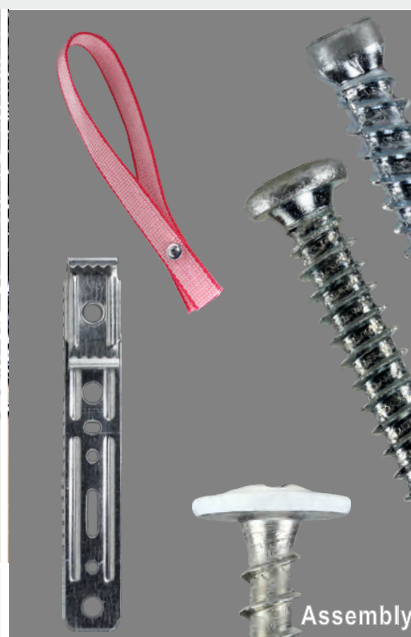

Assembly




Plastic items



Fittings



Chemicals

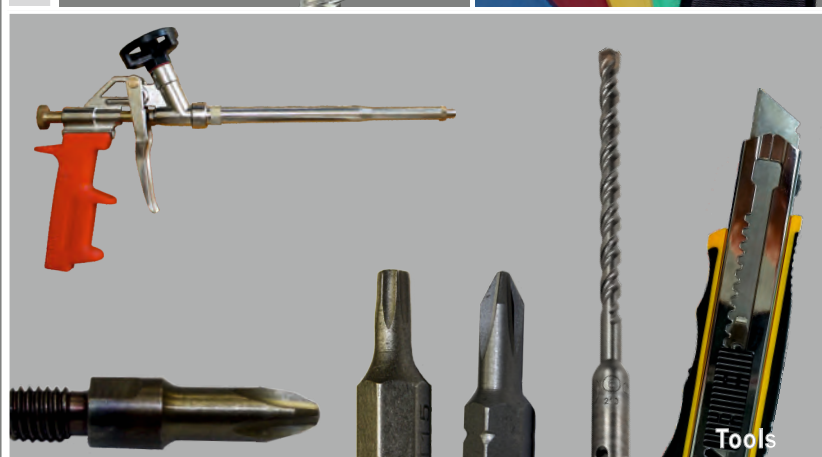

Tools

© heicko 09/2019

Duplication and reproduction of images, text and any other content, for anything other than purely private purposes requires our express written consent. We reserve the right to exercise our legal rights, to prevent the illegal use of the enclosed content.

Subject to technical changes, printing errors and mistakes.
Photos and other illustrations are not binding.



Table of contents

| | | |
|----------|--|-----------|
| 1 | Window construction screws | 1 |
| | Window screws for PVC-window manufacturing | 1 |
| | Self drilling screws | 4 |
| | Nipple screws | 6 |
| | Carrying aid for windows and doors | 7 |
| 2 | assembling and coupling elements | 9 |
| | Assembly screws | 9 |
| | Screws for aluminium windowsills | 11 |
| | Coupling elements | 12 |
| 5 | screws / DIN-items | 15 |
| | DIN 7504 N self drilling screw, pan head | 15 |
| | DIN 7504 P self drilling screw, countersunk head | 15 |
| 6 | tools | 17 |
| | Bits | 17 |
| | Drills | 20 |

Do you know?




heicko
e-ast gmbh

Zip-Screens



Solar panel for rechargeable heicko tubular motors HRSDC4013*
and ERSDC1040-06, 556 x 64 x 3 mm
Item no. HR1200-LA-SOLAR3

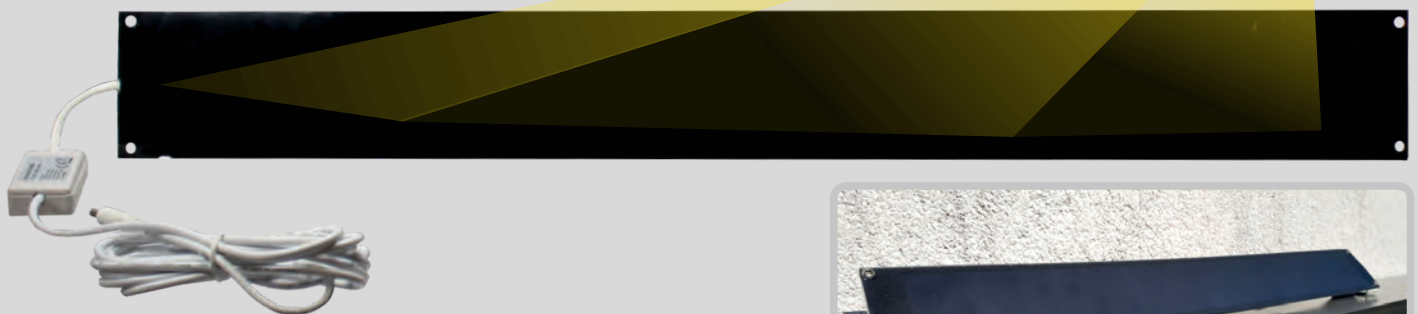

1 channel wind,
sun and rain sensor
Item no. HR1300-WIND-G2


1 channel sun sensor,
transparent suction cup
Item no. HR1200-SUN-G2



Do you know?





heicko
e-ast gmbh

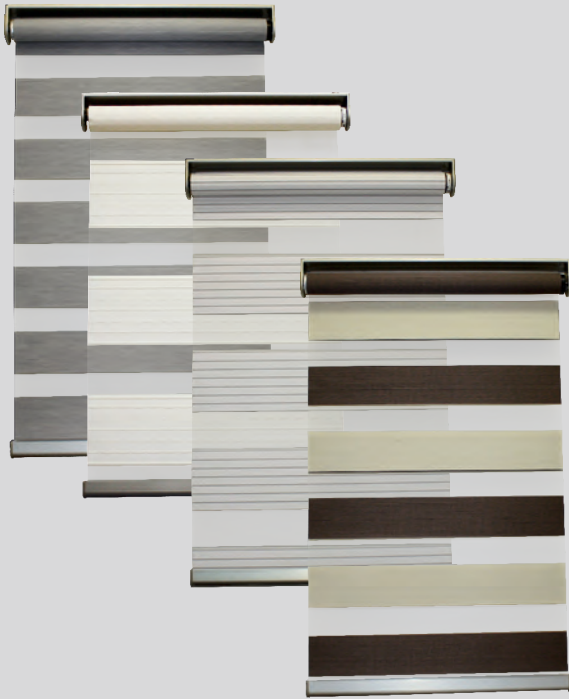

Window construction screws

Window screws for PVC-window manufacturing

Window screw Power-Speed



Item telegram



- Coarse thread, \varnothing 4.1 mm
- Cross recess PH2
- Gimlet point
- Flat oval head 90° , \varnothing 7.1 mm
- Brake ribs
- Screwing into metal with a pre-drilled hole of \varnothing 3.2 mm
- Head paint compatible with RAL possible, minimum order quantity: 5.000 pcs
- RAL colours possible on request
- **ift-Rosenheim approved, report no. 509 15799/1**

| Item no. | Description | Size | UE | Box packing |
|----------------|---|--------|------|-------------|
| 6151100-4.1-19 | PVC window screw with countersunk head, blue zinc plated, roller sorted | 4,1x19 | 2000 | 24000 |
| 6151100-4.1-22 | PVC window screw with countersunk head, blue zinc plated, roller sorted | 4.1x22 | 2000 | 16000 |
| 6151100-4.1-25 | PVC window screw with countersunk head, blue zinc plated, roller sorted | 4.1x25 | 2000 | 16000 |
| 6151100-4.1-30 | PVC window screw with countersunk head, blue zinc plated, roller sorted | 4.1x30 | 2000 | 16000 |
| 6151100-4.1-35 | PVC window screw with countersunk head, blue zinc plated, roller sorted | 4.1x35 | 2000 | 8000 |
| 6151000-4.1-40 | PVC window screw with countersunk head, blue zinc plated | 4.1x40 | 2000 | 8000 |
| 6151000-4.1-45 | PVC window screw with countersunk head, blue zinc plated | 4.1x45 | 2000 | 8000 |
| 6151000-4.1-55 | PVC window screw with countersunk head, blue zinc plated | 4.1x55 | 1000 | 4000 |

Window construction screws

Window screws for PVC-window manufacturing

Window screw Power-Speed



Item telegram



- Coarse thread, Ø 4.1 mm
- Cross recess PH2
- Gimlet point
- Flat oval head 90°, Ø 7.1 mm
- Brake ribs
- Surface coated "Top Silver 800"
- Screwing into metal with a pre-drilled hole of Ø 3.2 mm
- **ift-Rosenheim approved, report no. 509 15799/1 and 509 37933/2**

| Item no. | Description | Size | UE | Box packing |
|----------------|--|--------|------|-------------|
| 6151120-4.1-13 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x13 | 2000 | 24000 |
| 6151120-4.1-16 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x16 | 2000 | 24000 |
| 6151120-4.1-19 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x19 | 2000 | 24000 |
| 6151120-4.1-22 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x22 | 2000 | 16000 |
| 6151120-4.1-25 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x25 | 2000 | 16000 |
| 6151120-4.1-30 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x30 | 2000 | 16000 |
| 6151120-4.1-35 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x35 | 2000 | 8000 |
| 6151120-4.1-40 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x40 | 2000 | 8000 |
| 6151120-4.1-45 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x45 | 2000 | 8000 |
| 6151120-4.1-55 | PVC window screw, countersunk head, "Top Silver 800" | 4.1x55 | 1000 | 4000 |

Window construction screws

Window screws for PVC-window manufacturing

Window screw Power-Speed TX-drive



Item telegram

- Coarse thread, Ø 4.1 mm
- TX20-drive
- Gimlet point
- Flat oval head 90°, Ø 7.1 mm
- Brake ribs
- Screwing into metal with a pre-drilled hole of Ø 3.2 mm



| Item no. | Description | Size | UE | Box packing |
|----------------|---|--------|------|-------------|
| 6451120-4.1-22 | Window screw with countersunk head, TX20-drive, roller sorted, "Top Silver 800" | 4.1x22 | 2000 | 16000 |
| 6451120-4.1-25 | Window screw with countersunk head, TX20-drive, roller sorted, "Top Silver 800" | 4.1x25 | 2000 | 16000 |
| 6451120-4.1-30 | Window screw with countersunk head, TX20-drive, roller sorted, "Top Silver 800" | 4.1x30 | 2000 | 8000 |
| 6451120-4.1-35 | Window screw with countersunk head, TX20-drive, roller sorted, "Top Silver 800" | 4.1x35 | 2000 | 8000 |
| 6451000-4.1-40 | Window screw with countersunk head, TX20-drive, blue zinc plated, roller sorted | 4.1x40 | 2000 | 8000 |



Window construction screws

Self drilling screws

Self drilling screw NoRi




Item telegram

- Metal tapping screw thread Ø 3.9 mm
- Drill tip at least 4.5 mm
- Countersunk head 90°, cross recess PH2
- Head diameter depending on length:
 Ø 7.4 mm (l = 11-22 mm) without brake ribs
 Ø 7.1 mm (l = 25-45 mm) with brake ribs
- For steel reinforcement up to 3.5 mm

| Item no. | Description | Size | UE | Box packing |
|----------------|--|--------|------|-------------|
| 3112100-3.9-13 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated, roller sorted | 3.9x13 | 2000 | 24000 |
| 3112100-3.9-16 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated, roller sorted | 3.9x16 | 2000 | 24000 |
| 3112100-3.9-19 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated, roller sorted | 3.9x19 | 2000 | 12000 |
| 3112100-3.9-25 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated, roller sorted | 3.9x25 | 2000 | 16000 |
| 3112100-3.9-32 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated, roller sorted | 3.9x32 | 2000 | 8000 |
| 3112000-3.9-38 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated | 3.9x38 | 2000 | 8000 |
| 3112000-3.9-45 | self drilling screw, countersunk head, metal tapping screw thread, blue zinc plated | 3.9x45 | 2000 | 8000 |

self drilling screw NoRi "Top Silver 800"



Item telegram

- Metal tapping screw thread Ø 3.9 mm
- Drill tip 4.5 mm
- Countersunk head 90°, cross recess PH2
- Head diameter depending on length:
 Ø 7.4 mm (l = 16-22 mm)
 Ø 7.1 mm (l = 25-45 mm)
- Surface coated "Top Silver 800"
- Roller sorted
- For steel reinforcement up to 3.5 mm

| Item no. | Description | Size | UE | Box packing |
|----------------|---|--------|------|-------------|
| 3112120-3.9-16 | self drilling screw NoRi, countersunk head, metal tapping screw thread, roller sorted, "Top Silver 800" | 3.9x16 | 2000 | 24000 |
| 3112120-3.9-25 | self drilling screw NoRi, countersunk head, metal tapping screw thread, roller sorted, "Top Silver 800" | 3.9x25 | 2000 | 16000 |
| 3112120-3.9-32 | self drilling screw NoRi, countersunk head, metal tapping screw thread, roller sorted, "Top Silver 800" | 3.9x32 | 2000 | 8000 |
| 3112120-3.9-38 | self drilling screw NoRi, countersunk head, metal tapping screw thread, roller sorted, "Top Silver 800" | 3.9x38 | 2000 | 8000 |

Window construction screws

Self drilling screws

self drilling screw Metric PH-drive




Item telegram

- metric thread, Ø M4
- drill tip 4,5 mm
- countersunk head 90°, flat oval head from 22 mm onwards
- cross recess PH2
- for steel reinforcement up to 3,5 mm
- item no. 2512... with 6 mill-ribs

| Item no. | Description | Size | UE | Box packing |
|--------------|---|------|------|-------------|
| 2112100-4-13 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x13 | 2000 | 12000 |
| 2112100-4-16 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x16 | 2000 | 12000 |
| 2112100-4-19 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x19 | 2000 | 12000 |
| 2112100-4-22 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x22 | 2000 | 16000 |
| 2112100-4-25 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x25 | 2000 | 16000 |
| 2112100-4-32 | self drilling screw Metric PH-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x32 | 2000 | 8000 |

Self drilling screw Metric TX-drive



Item telegram

- Metric thread, Ø M4
- Drill tip 4,5 mm
- Countersunk head 90°
- TX20-drive
- For steel reinforcement up to 3,5 mm
- Item no. 2514... with 6 mill-ribs
- Roller sorted

| Item no. | Description | Size | UE | Box packing |
|--------------|---|------|------|-------------|
| 2412100-4-19 | self drilling screw Metric TX20-drive, countersunk head, metric thread, blue zinc plated, roller sorted | 4x19 | 2000 | 12000 |
| 2412120-4-25 | self drilling screw, TX20-drive, countersunk head, metric thread, surface coated "Top Silver 800" | 4x25 | 2000 | 16000 |

Window construction screws

Nipple screws


Nipple screws with plastic head




Item telegram

- For roller shutter rails and weatherboards
- Gimlet point for quick fastening into PVC
- PVC screw thread for better over-winding and extraction results
- Enables exact positioning
- Cross recess PH2
- Length: 9.5 mm / diameter: 4.1 mm
- With chip recess

| Item no. | Description | Size | UE | Box packing |
|----------|---|-------------|------|-------------|
| 568-HE | Nipple screw with plastic head for Veka, Brüggmann, Roplasto, Salamander | 4,1 x 10 mm | 1000 | 12000 |
| 574-HE | Nipple screw with plastic head for Rehau, Brüggmann, KBE, Inoutic, Schüco | 4,1 x 10 mm | 1000 | 12000 |
| 575-HE | Nipple screw with plastic head for Aluplast, Finstral, SKS, Menke | 4,1 x 10 mm | 1000 | 12000 |
| 581-HE | Nipple screw with plastic head for Gealan | 4,1 x 10 mm | 1000 | 12000 |
| 583-HE | Nipple screw with plastic head | 4,1 x 10 mm | 1000 | 12000 |
| 584-HE | Nipple screw with plastic head for Profine, Trocal, Schüco | 4,1 x 10 mm | 1000 | 12000 |
| 586-HE | Nipple screw with plastic head for Kömmerling | 4,1 x 10 mm | 1000 | 12000 |

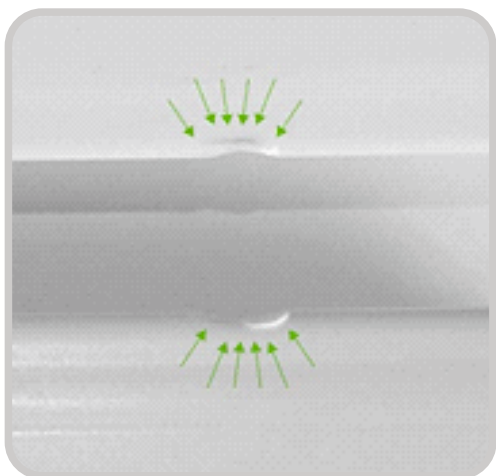

Plastic head

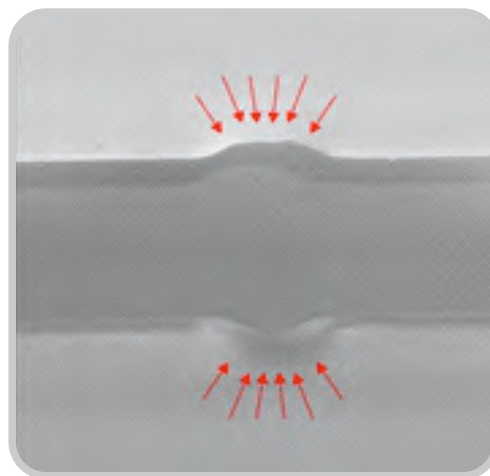

Steel head

Window construction screws

Carrying aid for windows and doors

Wrist strap for PVC windows



Item telegram

- Disposable carrying loop for lateral screwing on windows and doors
- Fixation on the frame with a self-drilling screw
- Strap made of durable nylon, width: 2 cm (red)
- Individual customer colors and imprint (company logo) on demand

| Item no. | Description | Size | UE | Box packing |
|----------|--|---------|-----|-------------|
| 1766 | Window carrying aid, strap 46 cm, aid with pre-mounted self drilling screw 4.2x25 mm | 2x46 cm | 500 | 500 |
| 1766-60 | Window carrying aid, strap 60 cm, aid with pre-mounted self drilling screw 4.2x25 mm | 2x60 cm | 400 | 400 |

Wrist strap for wooden windows



Item telegram

- Set consists of strap and screw
- Disposable carrying loop for lateral screwing on windows and doors
- Fixation on the frame with the pre-mounted self-drilling screw
- Strap made of durable nylon, width: 2 cm (green)
- Individual customer colors and imprint (company logo) on demand

| Item no. | Description | Size | UE | Box packing |
|-------------|--|-----------|-----|-------------|
| 1764-BMG | Window carrying aid for wood / stainless plastic window elements, with pre-mounted screw 5x40 mm, TX25 | 2 x 46 cm | 500 | 500 |
| 1764-BMG-PZ | Window carrying aid for wood / stainless plastic window elements, with pre-mounted screw 5x30 mm, PZ2 | 2 x 46 cm | 400 | 400 |

Do you know?

Tubular motors by heicko




heicko
e-ast gmbh

■ With mechanically adjustable limit positions



■ With mechanically adjustable limit positions and emergency hand crank function

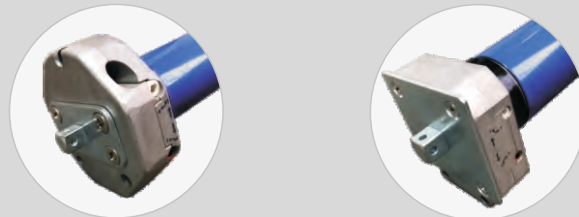



■ With automatically adjustable limit positions



assembling and coupling elements

assembly screws

Assembly screw, countersunk head

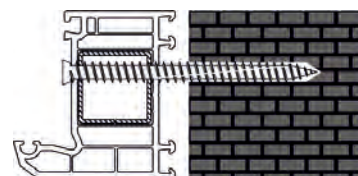

2

Item telegram

- Universal use, for assembly on rock, wood or metal constructions
- Ø 11,5 mm cap head with ribs
- TX30-drive
- Double thread
- Thread tip with reduced diameter
- V-flute
- Pre-drilling Ø 6.0 - 6.5 mm is required (dependent on the surface)
- Assembly in concrete with a percussion drill
- ift-Rosenheim approved, report no. 509 17269

Item information

- 1 - minimum screwing-in depth / mm
- 2 - concrete
- 3 - solid bricks
- 4 - lime-sand brick
- 5 - gas concrete
- 6 - hollow brick
- 7 - pumiced concrete


covering caps see item no. 111, 11110-1015 and 11110-9016

| Item no. | Description | Size | UE | Box packing |
|--------------|--|---------|-----|-------------|
| 1040-7.5-40 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x40 | 200 | 1200 |
| 1040-7.5-60 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x60 | 200 | 1200 |
| 1040-7.5-72 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x72 | 200 | 800 |
| 1040-7.5-92 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x92 | 200 | 800 |
| 1040-7.5-112 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x112 | 200 | 800 |
| 1040-7.5-132 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x132 | 100 | 600 |
| 1040-7.5-152 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x152 | 100 | 600 |
| 1040-7.5-182 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x182 | 100 | 400 |
| 1040-7.5-212 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x212 | 100 | 400 |
| 1040-7.5-252 | frame anchor screw, countersunk head, TX30, blue zinc plated | 7.5x252 | 100 | 400 |

assembling and coupling elements

assembly screws

Assembly screw, cylinder head

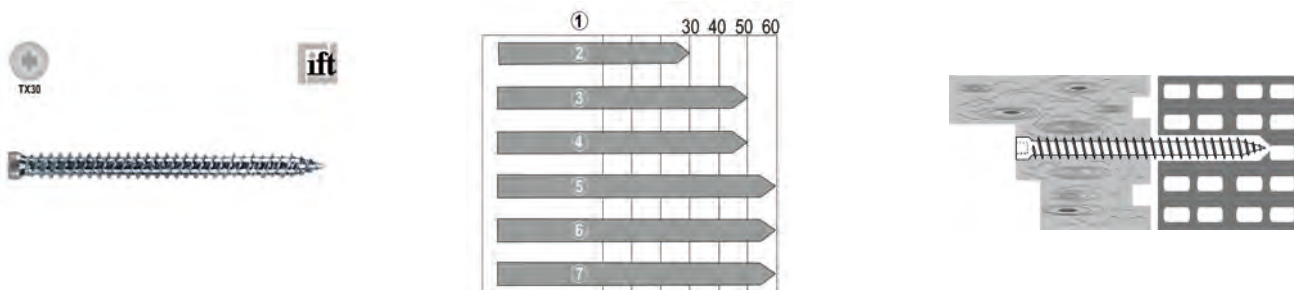

Item telegram

- Universal use, for assembly on wood or metal constructions
- 8 mm cylinder head with ribs
- TX30-drive
- Double thread
- Thread tip with reduced diameter
- V-flute
- Assembly in concrete with a percussion drill
- Pre-drilling \varnothing 6.0 - 6.5 mm is necessary (dependent on the surface)

Item information

- 1 - minimum screwing-in depth / mm
- 2 - concrete
- 3 - solid bricks
- 4 - lime-sand brick
- 5 - gas concrete
- 6 - hollow brick
- 7 - pumiced concrete



Covering caps see item no. 10361 and 10362

| Item no. | Description | Size | UE | Box packing |
|--------------|---|---------|-----|-------------|
| 1036-7.5-60 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x60 | 200 | 1200 |
| 1036-7.5-72 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x72 | 200 | 800 |
| 1036-7.5-92 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x92 | 200 | 800 |
| 1036-7.5-112 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x112 | 200 | 800 |
| 1036-7.5-132 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x132 | 100 | 600 |
| 1036-7.5-152 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x152 | 100 | 600 |
| 1036-7.5-182 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x182 | 100 | 800 |
| 1036-7.5-212 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x212 | 100 | 400 |
| 1036-7.5-252 | frame anchor screw, cylinder head, TX30, blue zinc plated | 7.5x252 | 100 | 400 |

assembling and coupling elements

screws for aluminium windowsills

Screws for aluminium window sills with flat oval head A2



Item telegram

- Stainless steel A2
- Flat oval head with washer A2
- Cross recess PH2
- Natural blank / colour varnished
- Particular colours from 5,000 pcs on request

Item information

Aluminium windowsill screw for the assembly of aluminium window sills in wood and PVC. Screwing into wood or PVC is possible straight away, there is no need of pre-drilling.

Please note: The pressed washer does not accomplish a sealing function. When using outside it may be necessary to use an additional sealing or to make use of a windowsill screw with a poly-washer.

| Item no. | Description | Size | UE | Box packing |
|------------------|---|--------|------|-------------|
| 6950-4.1-20 | screws for aluminium window sills with button head, natural blank | 4.1x20 | 1000 | 12000 |
| 6950-4.1-25 | screws for aluminium window sills with button head, natural blank | 4.1x25 | 1000 | 12000 |
| 6950-4.1-20-7016 | screw for aluminium window sills with button head, RAL 7016 anthracite grey | 4.1x20 | 1000 | 12000 |
| 6950-4.1-25-7016 | screw for aluminium window sills with button head, RAL 7016 anthracite grey | 4.1x25 | 1000 | 12000 |
| 6951-4.1-20 | screw for aluminium window sills with button head, white | 4.1x20 | 1000 | 12000 |
| 6951-4.1-25 | screw for aluminium window sills with button head, white | 4.1x25 | 1000 | 12000 |

assembling and coupling elements

coupling elements

Coupling elements, pan head




Item telegram

- Tapping thread
- 5 mm long drill tip
- Cross recess PH2
- Pan head

| Item no. | Description | Size | UE | Box packing |
|----------------|--|--------|-----|-------------|
| 3111000-4.8-60 | self drilling screw pan head, PH2, blue zinc plated, for elements coupling, partial thread 30 mm | 4.8x60 | 200 | 2400 |
| 3111000-4.8-70 | self drilling screw pan head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x70 | 200 | 2400 |
| 3111000-4.8-80 | self drilling screw pan head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x80 | 500 | 2000 |
| 3111000-4.8-90 | self drilling screw pan head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x90 | 500 | 2000 |

Coupling elements, countersunk head

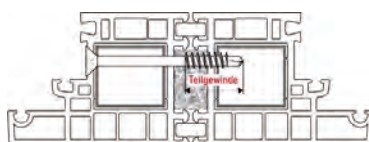

Item telegram

- Tapping thread, blue zinc plated
- 5 mm long drill tip
- Cross recess PH2 or TX
- Countersunk head
- Partial thread

| Item no. | Description | Size | UE | Box packing |
|-----------------|---|---------|------|-------------|
| 3112000-4.2-55 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 30 mm | 4.2x55 | 500 | 4000 |
| 3112000-4.8-50 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 30 mm | 4.8x50 | 1000 | 4000 |
| 3112000-4.8-60 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 30 mm | 4.8x60 | 250 | 3000 |
| 3112000-4.8-70 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x70 | 200 | 2400 |
| 3112000-4.8-80 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x80 | 200 | 2400 |
| 3112000-4.8-90 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 40 mm | 4.8x90 | 500 | 2000 |
| 3112000-4.8-100 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 50 mm | 4.8x100 | 250 | 2000 |
| 3112000-4.8-120 | self drill screw countersunk head, PH2, blue zinc plated, for elements coupling, partial thread 50 mm | 4.8x120 | 200 | 1600 |

screws / DIN-items

DIN 7504 N self drilling screw, pan head




Item telegram

- Self drilling screw according to DIN-standard
 - Pan head
 - Hardened, blue zinc plated
 - Additional sizes under item no. 3111*
- (chapter: screws for window production)

| Item no. | Description | Size | UE | Box packing |
|----------------|--|--------|------|-------------|
| 3111000-4.8-22 | self drilling screw pan head, cross recess PH2, DIN 7504 N, tapping screw thread, blue zinc plated | 4.8x22 | 1000 | |
| 3111000-4.8-25 | self drilling screw pan head, cross recess PH2, DIN 7504 N, tapping screw thread, blue zinc plated | 4.8x25 | 1000 | 8000 |
| 3111000-4.8-32 | self drilling screw pan head, cross recess PH2, DIN 7504 N, tapping screw thread, blue zinc plated | 4.8x32 | 500 | 6000 |
| 3111000-4.8-38 | self drilling screw pan head, cross recess PH2, DIN 7504 N, tapping screw thread, blue zinc plated | 4.8x38 | 1000 | 4000 |
| 3111000-4.8-50 | self drilling screw pan head, cross recess PH2, DIN 7504 N, tapping screw thread, blue zinc plated | 4.8x50 | 200 | 2400 |

DIN 7504 P self drilling screw, countersunk head



Item telegram

- Self drilling screw according to DIN-standard
 - Countersunk head
 - Hardened, blue zinc plated
 - Additional sizes under item no. 3112*
- (chapter: screws for window production)

| Item no. | Description | Size | UE | Box packing |
|----------------|--|--------|------|-------------|
| 3112000-4.8-25 | self drilling screw countersunk head, cross recess PH2, DIN 7504 P, metal tapping thread, blue zinc plated | 4.8x25 | 1000 | 8000 |
| 3112000-4.8-32 | self drilling screw countersunk head, cross recess PH2, DIN 7504 P, metal tapping thread, blue zinc plated | 4.8x32 | 1000 | 8000 |
| 3112000-4.8-38 | self drilling screw countersunk head, cross recess PH2, DIN 7504 P, metal tapping thread, blue zinc plated | 4.8x38 | 1000 | 4000 |
| 3112000-4.8-45 | self drilling screw countersunk head, cross recess PH2, DIN 7504 P, metal tapping thread, blue zinc plated | 4.8x45 | 1000 | 4000 |

Do you know?



heicko
e-ast gmbh


■ The motor can be charged with the help of a solar panel

■ Charging via USB or power jack plug

■ They can be integrated into our smart home systems



BATTERY

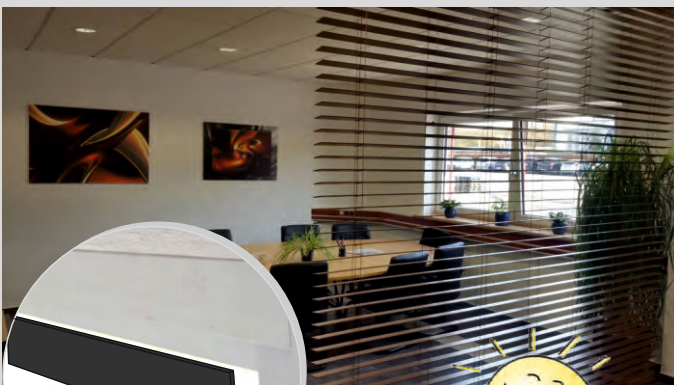

Tools

Bits

Phillips bits



Item telegram

- Intake into magnet holder
- Optimum fit
- Milled execution
- 1/4"

| Item no. | Description | Size | UE | Box packing |
|-----------|--|------------|----|-------------|
| 101-1-25 | bit insert Phillips PH1, length 25 mm | 1 x 25 mm | 10 | 1000 |
| 101-2-25 | bit insert Phillips PH2, length 25 mm | 2 x 25 mm | 10 | 1000 |
| 101-2-25R | bit insert Phillips PH2, length 25 mm, shortened | 2 x 25 mm | 10 | 1000 |
| 101-2-50 | bit insert Phillips PH2, length 50 mm | 2 x 50 mm | 10 | 1000 |
| 101-2-70 | bit insert Phillips PH2, length 70 mm (Wiha) | 2 x 70 mm | 10 | 1000 |
| 101-2-90 | bit insert Phillips PH2, length 90 mm | 2 x 90 mm | 10 | 1000 |
| 101-2-110 | bit insert Phillips PH2, length 110 mm | 2 x 110 mm | 10 | 1000 |
| 101-2-150 | bit insert Phillips PH2, length 150 mm | 2 x 150 mm | 10 | 200 |
| 100-2-25 | bit insert Phillips PH2, length 25 mm | 2 x 25 mm | 10 | 500 |
| 100-2-50 | bit insert Phillips PH2, length 50 mm | 2 x 50 mm | 10 | 500 |

Pozi bits



Item telegram

- Intake into magnet holder
- Optimum fit
- Milled execution
- 1/4"

| Item no. | Description | Size | UE | Box packing |
|----------|----------------------------|-----------|----|-------------|
| 102-2-25 | Pozi bit PZ2, length 25 mm | 2 x 25 mm | 10 | 1000 |
| 102-2-50 | Pozi bit PZ2, length 50 mm | 2 x 50 mm | 10 | 200 |
| 102-3-25 | Pozi bit PZ3, length 25 mm | 3 x 25 mm | 10 | 1000 |

Tools

Bits

TX-drive bits



Item telegram

- Intake into magnet holder
- Optimum fit
- Milled execution
- 1/4"

| Item no. | Description | Size | UE | Box packing |
|-----------|-------------------------------------|------------|----|-------------|
| 103-15-25 | bit insert TX15-drive, length 25 mm | 15 x 25 mm | 10 | 1000 |
| 103-15-50 | bit insert TX15-drive, length 50 mm | 15 x 50 mm | 10 | 1000 |
| 103-20-25 | bit insert TX20-drive, length 25 mm | 20 x 25 mm | 10 | 1000 |
| 103-20-50 | bit insert TX20-drive, length 50 mm | 20 x 50 mm | 10 | 1000 |
| 103-25-25 | bit insert TX25-drive, length 25 mm | 25 x 25 mm | 10 | 1000 |
| 103-25-50 | bit insert TX25-drive, length 50 mm | 25 x 50 mm | 10 | 1000 |
| 103-30-25 | bit insert TX30-drive, length 25 mm | 30 x 25 mm | 10 | 1000 |
| 103-30-50 | bit insert TX30-drive, length 50 mm | 30 x 50 mm | 10 | 1000 |
| 103-30-70 | bit insert TX30-drive, length 70 mm | 30 x 70 mm | 10 | 1000 |

Bits screwing machines



Item telegram

- Intake into magnet holder or into the screwing machine
- Optimum fit due to minus tolerances
- Milled execution
- All common thread dimensions available

| Item no. | Description | Size | UE | Box packing |
|----------------|---|------------|----|-------------|
| 119-PH2-33 | threaded bit M5 for screwing machines, Phillips PH2, length 33 mm | PH2x33 mm | 10 | 1000 |
| 119-PH2-33-7-R | Bit M5 PH2 "Reduced", length: 33 mm | PH2x33 mm | 10 | 4000 |
| 119-PH2-45 | threaded bit M5 for screwing machines, Phillips PH2, length 45 mm | PH2x45 mm | 10 | 1000 |
| 119-PH2-45-R | Bit M5 PH2 "Reduced", length: 45 mm | PH2x45 mm | 10 | 4000 |
| 120-PH2-45 | threaded bit M6 for screwing machines, Phillips PH2, length 45 mm | PH2x45 mm | 10 | 1000 |
| 121-PH2-45 | threaded bit "inch" for screwing machines, Phillips PH2, thread 10/32 | PH2x45 mm | 10 | 1000 |
| 121-PH2-45-R | Bit inch PH2 "Reduced", length: 45 mm | PH2x45 mm | 10 | 1000 |
| 119-TX20-33-7 | Bit M5 TX20 "with chamfer", length: 33 mm | TX20x33 mm | 10 | 4000 |
| 119-TX20-45 | Bit M5 TX20 "with chamfer", length: 45 mm | TX20x45 mm | 10 | 1000 |

Tools

Bits

Bit holder



Item telegram

- Magnet holder for bit intakes of 1/4"
- Firmly held in magnet holder
- Item no. 201-55 and item no. 201-70:
chrome plated conduction with lock washer and magnet
- Item no. 201-F40 chrome plated with quick-change chuck

| Item no. | Description | Size | UE | Box packing |
|----------|--|-------|----|-------------|
| 201-55 | magnetic bit chuck 1/4", 55 mm for bit intakes | 55 mm | 1 | 60 |
| 201-70 | magnetic bit chuck 1/4", 70 mm for bit intakes | 70 mm | 1 | 60 |

Tools

Drills

DIN 338 grounded spiral drill



Item telegram

- Heavy duty steel
- DIN 338 grounded/short
- Right-handed
- Extra long service life

| Item no. | Description | Size | UE | Box packing |
|----------|-----------------------------------|------|----|-------------|
| 108-2.5 | HSS drill DIN 338, grounded/short | 2.5 | 10 | 10 |
| 108-3 | HSS drill DIN 338, grounded/short | 3 | 10 | 10 |
| 108-3.2 | HSS drill DIN 338, grounded/short | 3.2 | 10 | 10 |
| 108-3.5 | HSS drill DIN 338, grounded/short | 3.5 | 10 | 10 |
| 108-4 | HSS drill DIN 338, grounded/short | 4 | 10 | 10 |
| 108-4.2 | HSS drill DIN 338, grounded/short | 4.2 | 10 | 10 |
| 108-4.5 | HSS drill DIN 338, grounded/short | 4.5 | 10 | 10 |
| 108-5 | HSS drill DIN 338, grounded/short | 5 | 10 | 10 |
| 108-5.5 | HSS drill DIN 338, grounded/short | 5.5 | 10 | 10 |
| 108-6 | HSS drill DIN 338, grounded/short | 6 | 10 | 10 |
| 108-6.5 | HSS drill DIN 338, grounded/short | 6.5 | 10 | 10 |
| 108-7 | HSS drill DIN 338, grounded/short | 7 | 10 | 10 |
| 108-8 | HSS drill DIN 338, grounded/short | 8 | 10 | 10 |
| 108-8.5 | HSS drill DIN 338, grounded/short | 8.5 | 10 | 10 |
| 108-9 | HSS drill DIN 338, grounded/short | 9 | 10 | 10 |
| 108-10 | HSS drill DIN 338, grounded/short | 10 | 10 | 10 |
| 108-12 | HSS drill DIN 338, grounded/short | 12 | 5 | 10 |
| 108-13 | HSS drill DIN 338, grounded/short | 13 | 5 | 10 |

Tools

Drills

DIN 340 grounded



Item telegram

- Heavy duty steel
- DIN 340 - grounded/long
- Right-handed
- Extra long service life

| Item no. | Description | Size | UE | Box packing |
|----------|----------------------------------|------|----|-------------|
| 105-2 | HSS drill DIN 340, grounded/long | 2 | 10 | 400 |
| 105-2.8 | HSS drill DIN 340, grounded/long | 2.8 | 10 | 400 |
| 105-3 | HSS drill DIN 340, grounded/long | 3 | 10 | 400 |
| 105-3.2 | HSS drill DIN 340, grounded/long | 3.2 | 10 | 400 |
| 105-3.5 | HSS drill DIN 340, grounded/long | 3.5 | 10 | 200 |
| 105-4 | HSS drill DIN 340, grounded/long | 4 | 10 | 200 |
| 105-4.1 | HSS drill DIN 340, grounded/long | 4.1 | 10 | 200 |
| 105-4.2 | HSS drill DIN 340, grounded/long | 4.2 | 10 | 200 |
| 105-4.5 | HSS drill DIN 340, grounded/long | 4.5 | 10 | 200 |
| 105-5 | HSS drill DIN 340, grounded/long | 5 | 10 | 180 |
| 105-5.5 | HSS drill DIN 340, grounded/long | 5.5 | 10 | 180 |
| 105-6 | HSS drill DIN 340, grounded/long | 6 | 10 | 180 |
| 105-6.2 | HSS drill DIN 340, grounded/long | 6.2 | 10 | 180 |
| 105-6.5 | HSS drill DIN 340, grounded/long | 6.5 | 10 | 160 |
| 105-7 | HSS drill DIN 340, grounded/long | 7 | 10 | 160 |
| 105-7.5 | HSS drill DIN 340, grounded/long | 7.5 | 10 | 100 |
| 105-8 | HSS drill DIN 340, grounded/long | 8 | 10 | 100 |
| 105-8.5 | HSS drill DIN 340, grounded/long | 8.5 | 10 | 100 |
| 105-9 | HSS drill DIN 340, grounded/long | 9 | 10 | 80 |
| 105-10 | HSS drill DIN 340, grounded/long | 10 | 10 | 100 |

Tools

Drills

Stone drill, 2 carbide cutting edges



Item telegram

- Drilling into concrete-masonry and natural stone
- Excellent service life due to a special soldering technique
- SDS-plus absorbtion
- 2-cutter-centering tip
- 4-times spirals for convey

| Item no. | Description | Size | UE | Box packing |
|-------------|--|---------|----|-------------|
| 106-6-160 | stone drill with SDS-plus shank, long service life | 6x160 | 5 | 300 |
| 106-6-210 | stone drill with SDS-plus shank, long service life | 6x210 | 5 | 300 |
| 106-6-260 | stone drill with SDS-plus shank, long service life | 6x260 | 5 | 300 |
| 106-6-310 | stone drill with SDS-plus shank, long service life | 6x310 | 5 | 150 |
| 106-6-460 | stone drill with SDS-plus shank, long service life | 6x460 | 5 | |
| 106-6.5-160 | stone drill with SDS-plus shank, long service life | 6.5x160 | 5 | 300 |
| 106-6.5-210 | stone drill with SDS-plus shank, long service life | 6.5x210 | 5 | 300 |
| 106-6.5-260 | stone drill with SDS-plus shank, long service life | 6.5x260 | 5 | 250 |
| 106-12-310 | stone drill with SDS-plus shank, long service life | 12x310 | 5 | |
| 106-6.5-310 | stone drill with SDS-plus shank, long service life | 6.5x310 | 5 | 150 |
| 106-8-210 | stone drill with SDS-plus shank, long service life | 8x210 | 5 | |
| 106-8-260 | stone drill with SDS-plus shank, long service life | 8x260 | 5 | |
| 106-8-310 | stone drill with SDS-plus shank, long service life | 8x310 | 5 | 300 |

Stone drill, 4 carbide cutting edges



Item telegram

- Drilling into concrete-masonry and natural stone
- SDS-plus absorbtion
- 4 carbide cutting edges arranged in an X-shape
- Low vibration drilling
- No jamming on light concrete reinforcements

| Item no. | Description | Size | UE | Box packing |
|-------------|---|---------|----|-------------|
| 110-6-160 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6x160 | 5 | 200 |
| 110-6-210 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6x210 | 5 | 200 |
| 110-6-260 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6x260 | 5 | 200 |
| 110-6-310 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6x310 | 5 | 200 |
| 110-6.5-160 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6.5x160 | 5 | |
| 110-6.5-210 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6.5x210 | 5 | 200 |
| 110-6.5-260 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6.5x260 | 5 | 200 |
| 110-6.5-310 | stone drill with SDS-plus shank, 4 carbide cutting edges arranged in an X-shape | 6.5x310 | 5 | 200 |



heicko
e-ast gmbh

verkauf@heicko.de
www.heicko-bewegt.de

heicko e-ast GmbH
Käthe-Kollwitz-Straße 15
D-51545 Waldbröl

Tel.: +49 2291 9084 0
Fax: +49 2291 9084 50

www.heicko.de
verkauf@heicko.de