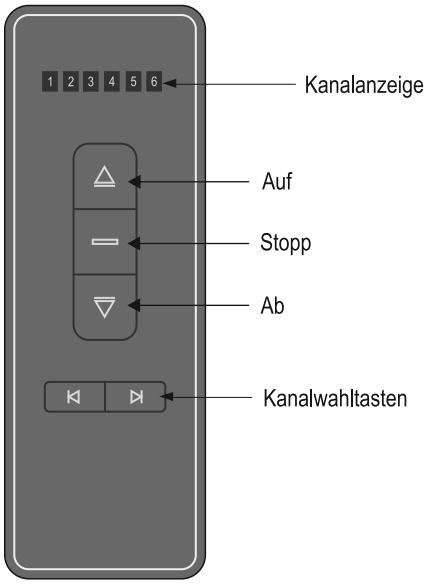

HR1200DC-6
6-Kanal Handfunksender
mit LED-Anzeige

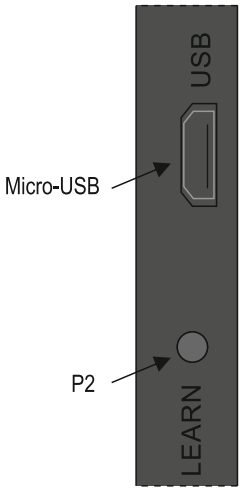

Rechte Gehäuseseite
- vergrößert -

QR-Code für
Bedienungsanleitung

Technische Daten

- Lithium-Ionen Akku 3,7 V, 150 mAh
- Frequenz 433,92 MHz
- Umgebungstemperatur: 5°C bis 40°C

Hinweise

Achtung!
Lesen Sie vor der Inbetriebnahme die Bedienungsanleitungen des Handfunkfunksenders sowie auch des Funkrohrmotors/Empfängers aufmerksam durch und beachten Sie deren Hinweise.

Wichtige Hinweise!
Die hier beschriebenen Handfunksender sind ausschließlich für die Funksignalübertragung zu unseren Funkrohrmotoren ERSDC3808-30 und ERF1040-06 vorgesehen. Zu anderen Funksystemen ist er **nicht** kompatibel.

Der Umfang dieser Anleitung beschränkt sich auf die Beschreibung der Handfunksender als Bedienungselement. Die Beschreibung der Programmierung („Einlernen" etc.) in Bezug auf die o.g. Funkrohrmotoren erfolgt in den Anleitungen der Funkrohrmotoren.

Achtung!
Elektro- und Elektronikgeräte wie auch Geräte mit nicht austauschbarem Akku sowie Batterien und Akkus sind nicht im Hausmüll zu entsorgen! Nutzen Sie zur Entsorgung von „Elektro-/Elektronik-Schrott" die von Kommunen betriebenen Sammelstellen oder einen ggf. angebotenen Abfuhrservice.

6-Kanal Handfunksender mit LED-Anzeige

Der Handfunksender ist mit einem integrierten Lithium-Ionen Akku ausgestattet. Dieser Akku kann mit den meisten Ladegeräten von handelsüblichen Smartphones geladen werden. An der rechten Gehäuseseite befindet sich dazu eine Anschlussmöglichkeit (Micro-USB). Dieser Akku ist nicht austauschbar. Versuchen Sie nicht das Gehäuse zu öffnen; um den Akku zu entnehmen. Das Gehäuse würde dadurch irreversibel beschädigt.

Die Tastenbelegung für die allgemeinen Funktionen ist in der Abbildung oben auf dieser Seite dargestellt.

Die 6 LED's auf der Vorderseite zeigen den jeweils aktiven Kanal an. Mit den Kanalwahltasten wird der gewünschte Kanal ausgewählt. Mit jeder Tastenbetätigung wechselt der Kanal immer auf- oder absteigend.

Ist Kanal 6 aktiv, so wird durch ein weiteres Drücken der rechten Kanalwahltaste (aufsteigend) die Gruppenfunktion aktiv. Diese Funktion wird durch das gleichzeitige Leuchten der 6 LED's angezeigt. In der Gruppenfunktion können durch Drücken der Funktionstasten Auf, Stopp und Ab die 6 Kanäle gleichzeitig angesteuert und gemeinsam bedient werden.

EU Konformitätserklärung

Hiermit erklären wir, dass das nachfolgend bezeichnete Produkt

Handfunksender (Akku-Betrieb)

HR1200DC-6 433,92 MHz

den Harmonierungsvorschriften folgender EU-Richtlinien entspricht:

EMC-Richtlinie 2014/30/EU
RED-Richtlinie 2014/53/EU

Angewandte harmonisierte Normen:
DIN EN 301489-1, DIN EN 301489-3, DIN EN 300220-1, DIN EN 300220-2

© 2018 - Vervielfältigung und Nachdruck von Bildern, Texten und sonstigen Inhalten zu anderen als rein privaten Zwecken bedarf unserer ausdrücklichen und schriftlichen Einwilligung. Gegen die unzulässige Nutzung der Inhalte behalten wir uns alle rechtlichen Maßnahmen vor.

Technische Änderungen, Druckfehler und Irrtümer vorbehalten. Fotos und sonstige Abbildungen sind unverbindlich.
Abbildungen können modell-/typenabhängig variieren.

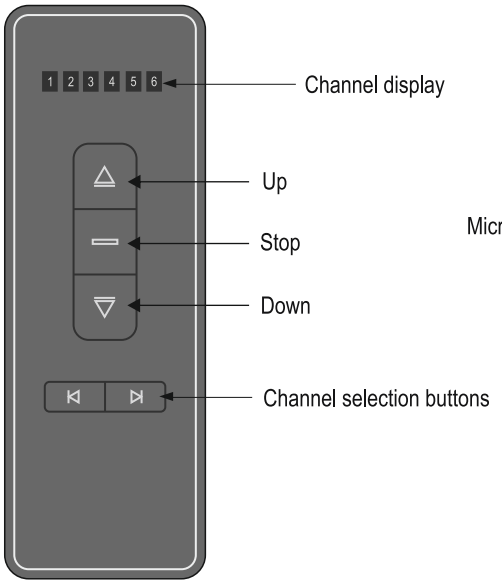

HR1200DC-6
6-Channel emitter
with LED display

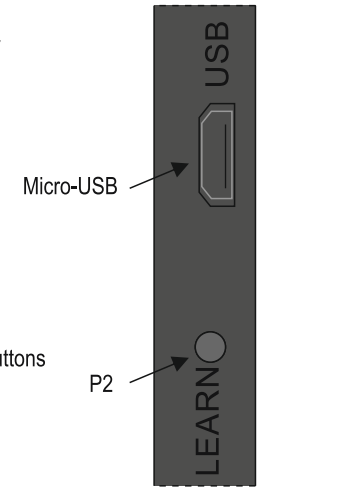

Right side of housing - enlarged -

QR-Code for
User manual

Technical data

- Lithium-ion battery 3.7 V, 150 mAh
- Frequency: 433.92 MHz
- Ambient temperature: 5°C to 40°C

Notes

Attention!
Please carefully read the operating instructions of the emitter as well as the instructions of the tubular motor with built-in receiver / external receiver before commissioning and observe its instructions.

Important notes!
The emitters described are exclusively intended for the transmission of radio signals to our tubular motor models ERSDC3808-30 and ERF1040-06. They are **not** compatible with other radio systems.

The scope of this manual is limited to the description of the emitter as a control element. The description of the programming ("teaching", etc.) with respect to the above mentioned tubular motors with built-in receiver is given in the instructions for the tubular motors with built-in receivers.

Attention!
Electrical and electronic devices and devices with non-replaceable batteries, as well as batteries and accumulators should not be disposed in the household waste! For the disposal of "electrical / electronic scrap", use the collection points operated by municipalities or a disposal service where applicable.

6-Channel emitter with LED display

The emitter is equipped with an integrated lithium-ion battery. This rechargeable battery can be charged with most chargers from commercially available smartphones. On the right side of the housing is a connection possibility (Micro-USB). This battery is not interchangeable. Do not attempt to open the housing to remove the battery. The housing can thus be irreversibly damaged.

The button assignment for the general functions is shown in the figure at the top of this page.

The 6 LEDs on the front show the active channel. The desired channel is selected with the channel selection buttons. Each time the button is pressed, the channel changes ascending or descending.

If channel 6 is active, the group function is activated by pressing the right channel selection button (ascending). This function is indicated by the simultaneous illumination of the 6 LEDs. In the group function, pressing the function buttons Up, Stop and Down can be used to control the six channels simultaneously and to operate them together.

EU Declaration of Conformity

We hereby declare that the following product

emitter (battery operation)

HR1200DC-6 433.92 MHz

complies with the harmonization requirements of the following EU guidelines:

EMC-guideline 2014/30/EU
RED-guideline 2014/53/EU

Applied harmonized standards:
DIN EN 301489-1, DIN EN 301489-3, DIN EN 300220-1, DIN EN 300220-2

© 2018 - Reproduction and reproduction of images, texts and other content for purposes other than purely private needs our express and written consent. We reserve the right to take legal action against the unauthorized use of the content.

Technical changes, printing errors and mistakes reserved. Photographs and other illustrations are not binding.
Illustrations may vary by model / type.