


Art. Nr.: 108-***HSS-G Spiralbohrer DIN 338**

komplett geschliffene HSS Bohrer, Kreuzanschliff, Spitzenwinkel 135°, lose
HSS-G Twist Drill Bits DIN 338, fully ground, split point, 135° point angle, bulk
Forets HSS DIN 338, taillés dans la masse, affûtage en croix, 135°, vrac

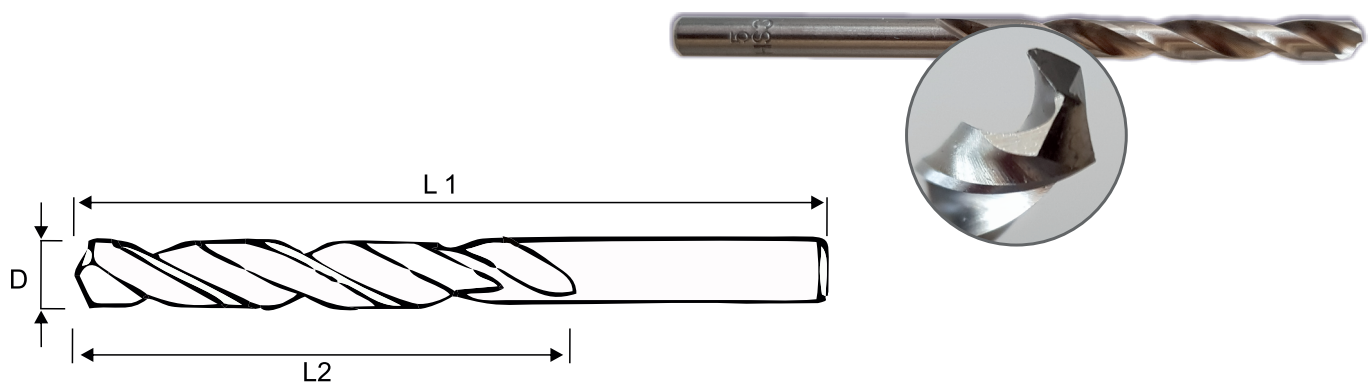

Art.-Nr.	Durchmesser [D]	Arbeitslänge [L2]	Gesamtlänge [L1]
108-2.5	2,5 mm	30 mm	57 mm
108-3	3 mm	33 mm	61 mm
108-3.2	3,2 mm	36 mm	65 mm
108-3.5	3,5 mm	39 mm	70 mm
108-4	4 mm	43 mm	75 mm
108-4.1	4,1 mm	43 mm	75 mm
108-4.2	4,2 mm	43 mm	75 mm
108-4.3	4,3 mm	47 mm	80 mm
108-4.5	4,5 mm	47 mm	80 mm
108-5	5 mm	52 mm	86 mm
108-5.5	5,5 mm	57 mm	93 mm
108-6	6 mm	57 mm	93 mm
108-6.5	6,5 mm	63 mm	101 mm
108-7	7 mm	69 mm	109 mm
108-8	8 mm	75 mm	117 mm
108-8.5	8,5 mm	75 mm	117 mm
108-9	9 mm	81 mm	125 mm
108-10	10 mm	87 mm	133 mm
108-12	12 mm	101 mm	151 mm
108-13	13 mm	101 mm	151 mm