


Art.-Nr. 105-*

HSS-G Spiralbohrer DIN 340, lang

komplett geschliffene HSS Bohrer, Kreuzanschliff, Spitzenwinkel 135°, lose

SS Twist Drill Bits DIN 340 long, ground, split point, point angle 135°, bulk

Forets HSS DIN 340, longs, taillés, affûtage en croix, angle de pointe à 135°, en vru

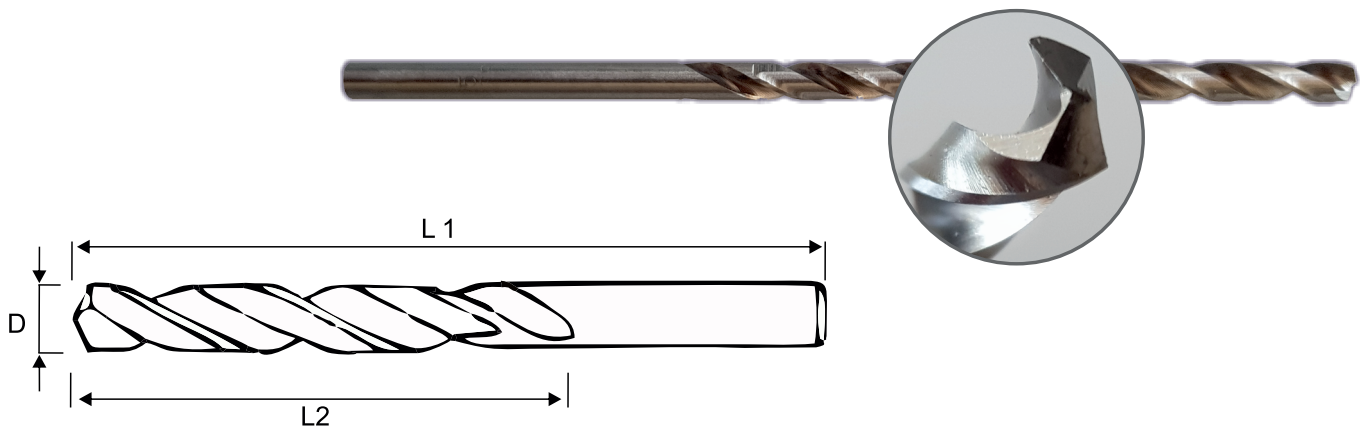

Art.-Nr.	Durchmesser [D]	Arbeitslänge [L2]	Gesamtlänge [L1]
105-2	2 mm	56 mm	85 mm
105-2.8	2,8 mm	66 mm	100 mm
105-3	3 mm	63 mm	100 mm
105-3.2	3,2 mm	69 mm	106 mm
105-3.5	3,5 mm	73 mm	110 mm
105-4	4 mm	78 mm	119 mm
105-4.1	4,1 mm	78 mm	119 mm
105-4.2	4,2 mm	82 mm	126 mm
105-4.5	4,5 mm	82 mm	126 mm
105-5	5 mm	87 mm	132 mm
105-5.5	5,5 mm	91 mm	139 mm
105-6	6 mm	91 mm	139 mm
105-6.2	6,2 mm	97 mm	148 mm
105-6.5	6,5 mm	97 mm	148 mm
105-6.8	6,8 mm	102 mm	148 mm
105-7	7 mm	102 mm	156 mm
105-7.5	7,5 mm	102 mm	156 mm
105-8	8 mm	109 mm	165 mm
105-8.5	8,5 mm	109 mm	165 mm
105-9	9 mm	115 mm	175 mm
105-9.5	9,5 mm	115 mm	175 mm
105-10	10 mm	121 mm	184 mm